
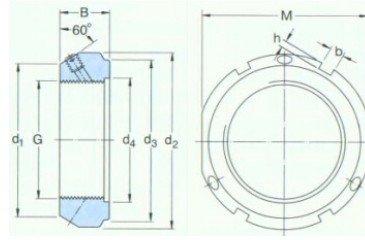


KMT precision lock nut with locking pin



Designation		Sunk screw (Nm)		Dimensions(mm)									Nuts required for dismounting		Breakout torque(Nm)		Weight
Lock nut	Appropriate hook spanners	Dimensions	Advised breakout torque	G	d1	d2	d3	d4	B	b	h	M	Sta			kg	
KMT0	HN2/3	M5	4,5	M 10×0,75	21	28	23	11	14	4	2	24	35		15	0,045	
KMT1	HN3	M5	4,5	M 12×1	23	30	25	13	14	4	2	27	40		18	0,050	
KMT2	HN4	M5	4,5	M 15×1	26	33	28	16	16	4	2	30	60		20	0,075	
KMT3	HN4	M6	8	M 17×1	29	37	33	18	18	5	2	34	80		25	0,10	
KMT4	HN5	M6	8	M 20×1	32	40	35	21	18	5	2	36	90		35	0,11	
KMT5	HN5	M6	8	M 25×1,5	36	44	39	26	20	5	2	41	130		45	0,13	
KMT6	HN6	M6	8	M 30×1,5	41	49	44	32	20	5	2	46	160		55	0,16	
KMT7	HN7	M6	8	M 35×1,5	46	54	49	38	22	5	2	50	190		65	0,19	
KMT8	HN8/9	M8	18	M 40×1,5	54	65	59	42	22	6	2,5	60	210		80	0,30	
KMT9	HN9/10	M8	18	M 45×1,5	60	70	64	48	22	6	2,5	65	240		95	0,33	
KMT10	HN10/11	M8	18	M 50×1,5	64	75	68	52	25	7	3	70	300		115	0,40	
KMT11	HN12/13	M8	18	M 55×2	74	85	78	58	25	7	3	80	340		225	0,54	
KMT12	HN13	M8	18	M 60×2	78	90	82	62	26	8	3,5	85	380		245	0,61	
KMT13	HN14	M8	18	M 65×2	83	95	87	68	28	8	3,5	90	460		265	0,71	
KMT14	HN15	M8	18	M 70×2	88	100	92	72	28	8	3,5	95	490		285	0,75	
KMT15	HN15/16	M8	18	M 75×2	93	105	97	77	28	8	3,5	100	520		305	0,80	
KMT16	HN16/17	M8	18	M 80×2	98	110	100	83	32	8	3,5	-	620		325	0,90	
KMT17	HN17/18	M10	35	M 85×2	107	120	110	88	32	10	4	-	650		660	1,15	
KMT18	HN18/19	M10	35	M 90×2	112	125	115	93	32	10	4	-	680		720	1,20	
KMT19	HN19/20	M10	35	M 95×2	117	130	120	98	32	10	4	-	710		780	1,25	
KMT20	HN20	M10	35	M 100×2	122	135	125	103	32	10	4	-	740		840	1,30	
KMT22	HN22	M10	35	M 110×2	132	145	134	112	32	10	4		800		960	1,45	
KMT24	TMFN23-30	M10	35	M 120×2	142	155	144	122	32	10	4		860		1080	1,60	
KMT26	TMFN23-30	M10	35	M 130×2	152	165	154	132	32	12	5		920		1200	1,70	
KMT28	TMFN23-30	M10	35	M 140×2	162	175	164	142	32	14	6		980		1320	1,80	

KMT precision lock nut with locking pin

KMT30	TMFN23-30	M10	35	M 150×2	172	185	174	152	32	14	6		1040	1440	1,95
KMT32	TMFN30-40	M10	35	M 160×3	182	195	184	162	32	14	6		1100	1600	2,10
KMT34	TMFN30-40	M10	35	M 170×3	192	205	192	172	32	14	6		1160	1750	2,20
KMT36	TMFN30-40	M10	35	M 180×3	202	215	204	182	32	16	7		1220	1900	2,30
KMT38	TMFN30-40	M10	35	M 190×3	212	225	214	192	32	16	7		1280	2050	2,40